

wire-probe sensor

type: GM



picture alike

GM

5007 010x 0000

Apr-21

- _ exactly switching
- _ metal housing
- _ simply installation
- _ no electronic necessary
- _ one wire cable
- _ different diameters

application range

checking part position or riveted bolt dimensional check.

technical data

feature

housing	brass
operating temperature range	0...+40°C
output	n-switching
spring deflection	1.5mm
diameters	4mm/8mm
cable length	2.5m

subject to change

TRsystems GmbH, system area
 UNIDOR
 Freiburger Straße 3
 75179 Pforzheim
 Tel. +49 (0) 7231 3152-0
 unidor@trsystems.de
www.unidor.de

wire-probe sensor

type: GM

GM

5007 010x 0000

Apr-21

order data / types

type	description	order number
GM 04	Fühlstift 4mm, 2.5m Kabel ohne Stecker	5007 0101 0000
GM 08	Fühlstift 8mm, 2.5m Kabel ohne Stecker	5007 0104 0000

types/ dimensions

type	measure A	measure B	measure D
GM 04	1.5mm	28mm	4mm
GM 08	3mm	33mm	8mm

subject to change

TRsystems GmbH, system area
UNIDOR
Freiburger Straße 3
75179 Pforzheim
Tel. +49 (0) 7231 3152-0
unidor@trsystems.de
www.unidor.de

wire-probe sensor


type: GM

dimensions

GM

5007 010x 0000

Apr-21

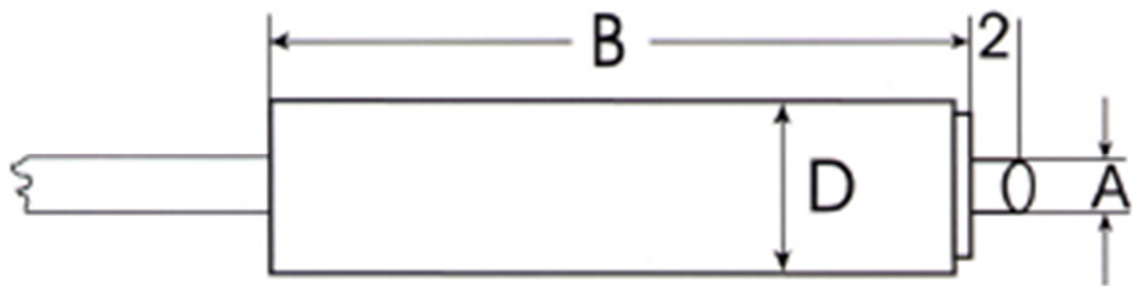

subject to change

TRsystems GmbH, system area

UNIDOR

Freiburger Straße 3

75179 Pforzheim

Tel. +49 (0) 7231 3152-0

unidor@trsystems.de

www.unidor.de